

### SECTION THRU CONTACT

### SPECIFICATIONS:

INSULATOR: PHENOLIC

CONTACT: BeCu., SPRING TEMPERED  
30u GOLD OVER 30u NICKEL

LATCH: BeCu., SPRING TEMPERED  
NICKEL PLATED


THERMAL RANGE: -55°C/+155°C

### FEATURES:

ACCOMMODATES PACKAGE WITH LEAD WIDTH FROM .014 TO .028 & LEAD THICKNESS FROM .005 TO .012.

REPAIRABLE.

SMALL SIZE.

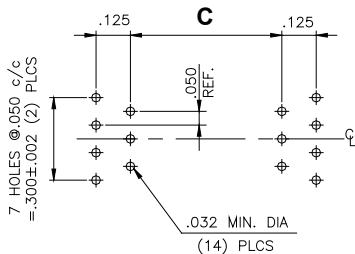

### FOOTPRINT

SOCKET SIDE OF BOARD

PART No	A	B	C
5100-1	.155	.840	.215
5100-2	.281	.966	.341
5100-3	.406	1.090	.466
5100-4	1.100	1.785	1.160
5100-5	.510	1.195	.570
5100-6	.810	1.495	.870